

MODULAR 800

Rev. 02 - October 2024




Fog emission and saturation:

up to 2400 m³ in 64 seconds
(800 m³ visibility less than 1 m)

A compact and light fogging system, inside the cabinet, even if small in size, it is possible to place optional boards in special spaces such as alarm panels, sensors, etc.

The front cover is made of plastic material to make the wireless communication easier between the internally installed devices and the outside.

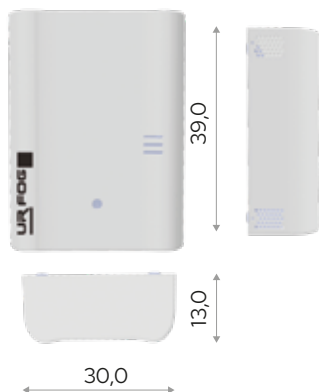

UR FOG
**FOG
STORM**

Fogging system with
patented **PUMP** and "**LAYER**"
heating **TECHNOLOGIES**

Compact cabinet	yes
Weight of the fogging system	9,5 Kg
Overall packaging weight	10,5 Kg
Units on one pallet (100×120 cm)	42
Dimension of the machine	L 30,0 x x W 13,0 H 39,0 cm
Dimension of the packaging	L 36,0 x W 19,0 x H 45,0 cm
Colors	white - optional black
Operating time without mains power	over 1 hour
Heating time	around 2 hours
Vertical mounting	yes
Horizontal mounting	yes
Usb port for computer monitoring (Windows and Linux)	yes
Serial interface RS232 with UR FOG Standard protocol	yes
Lan Connection : Active Cloud	optional
"Layer" heating system	
Single shot coverage (visibility more than 1,5 m)	up to 2400 m ³
Single shot coverage (visibility less than 1 m)	up to 800 m ³
Maximum emission time in a single shot	64 sec
Total discharge capability with full bag	1700 m ³
Number of bags	1
Amount of fluid in the bag	1000 ml
Shot characteristics	programmable in seconds
Number of bags included	1
2 cabled inputs: arming and shooting	yes
3 cabled output: arming/shooting status, low fluid and system error	yes
Top internal riser for optional boards	no
Side internal riser for optional boards	yes
Front panel in plastic material	yes
ELECTRICAL SPECIFICATIONS	
Mains power	230 V or 120 V
Average consumption	48 W
Heater max power in start	280 W
2 Ah 12V back up battery (not included)	yes

FOG FLUID
CERTIFIED

Complies with
european
CE

Meets
EUROPEAN
Standard